

SELF-DAN PE

SELF-DAN PE is a self-adhesive bituminous waterproofing sheet with non-protected surface of 1.5 kg/m².

Composed of self-adhesive polymer bitumen with an upper surface finish of a polyethylene film used as a reinforcement and a lower surface finish of self-adhesive polyethylene film. Product used for the waterproofing of underground walls and inverted roofs under tiles.



TECHNICAL DATA

TECHNICAL DATA	VALUE	UNIT	STANDARD
External fire performance	PND	-	UNE-EN 1187;prUNE-EN 13501-5
Reaction to fire	F	-	UNE-EN 11925-2; UNE-EN 13501-1
Watertightness	Pasa	-	UNE-EN 1928
Longitudinal tensile strength	200 ± 100	N/5cm	UNE-EN 12311-1
Transversal tensile strength	200 ± 100	N/5cm	UNE-EN 12311-1
Longitudinal elongation at break	350 ± 100	%	UNE-EN 12311-1
Transversal elongation at break	350 ± 100	%	UNE-EN 12311-1
Resistance to root penetration	No Pasa	-	EN 13984
Resistance to static loading	5	kg	UNE-EN 12730
Resistance to impact	400	mm	UNE-EN 12691
Longitudinal resistance to tearing (nail shank)	180 ± 50	N	UNE-EN 12310-1
Transversal resistance to tearing (nail shank)	180 ± 50	N	UNE-EN 12310-1
Joint strength: peel resistance	PND	-	UNE-EN 12316-1
Joint strength: shear resistance	200 ± 100	-	UNE-EN 12317-1
Flexibility at low temperature	< -15	°C	UNE-EN 1109
Humidity resistance factor	115000	-	EN 1931
Humidity flow density coefficient	2.56, Exp-9	Kg(m ² .s)	EN 1931
Dangerous substances	PND	-	-

Pasa = Positive or correct No pasa = Negative PND = No performance determined - = Not necessary

ADDITIONAL TECHNICAL DATA

ADDITIONAL DATA	VALUE	UNIT	STANDARD
Nominal thickness	1.5	mm	-
Flow resistance at elevated temperature	>70	°C	UN-EN 1110
Dimensional stability at elevated temperature (longitudinal)	< 2.5	%	UNE-EN 1107-1
Dimensional stability at elevated temperature (transversal)	< 2.5	%	UNE-EN 1107-1
Adhesion of granules	PND	%	UNE-EN 12039


Membranes thickness tolerance: = -0,3 mm, apart from membranes with thickness 2 and 2,4 mm whose tolerance is = -0,2 mm.
 Membranes mass per unit area tolerance: -5% (mini) and +10% (maxi) from nominal value.

STANDARDS & CERTIFICATION

- UNE EN 13707.
- UNE EN 13969.

PRESENTATION

PRESENTATION	VALUE	UNIT
Length	20	m
Width	1	m
Roll surface	20	m ²
Rolls per pallet	25	rolls
Product Code	192200	-

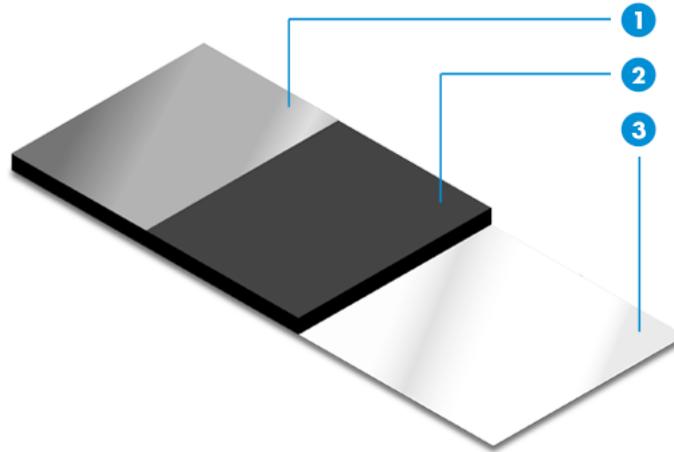

1. polyethylene film
2. self-adhesive SBS modified bitumen
3. self-adhesive polyethylene film

INDICATIONS AND IMPORTANT RECOMMENDATIONS

- SELF-DAN PE should not be applied with temperature below +10°.
- Must be stored in a dry place protected from rain, sun, heat and cold temperatures.
- Sun exposure of the product may difficult the removal of the polyethylene non-stick film.
- SELF-DAN PE should be kept exposed to the sun for the minimum possible time in order to prevent from U.V. rays damage. It is recommended to cover SELF-DAN PE few hours after application.

MAINTENANCE RECOMMENDATIONS

Maintenance requirements for Danosa Roofing Products

The following maintenance checks must be adhered to:

- A general examination on the condition of the waterproofing and surrounding roof components.
- An inspection of all functional roofing elements including skylights, outlets, upstands, penetrations and any other visible roofing components.
- Clean outlets, drains, gutters and remove any debris from the roof.
- Periodic removal of mildew, moss, herbs or any other kind of vegetation that has been accumulation on the waterproofing.
- Periodic removal of possible sediments accumulated on the deck (silt, sledges, slate granules, etc) by occasional water accumulation.
- Periodic removal of debris and small objects that may have accumulated on the roof.
- Ensure surrounding structural elements are sound such as eaves, flashings, slate tiles and brickwork.
- Ensure that the waterproofing is in good condition and there are no blisters, damage or separation.
- Review the condition of the waterproofing (adherence to upstands, condition of overlaps, visual appearance, etc) and repair the defects observed.

These operations must be carried out twice a year, preferably at the beginning of spring or autumn and must be increased in case of decks or valleys with zero falls. It is also necessary to perform additional maintenance depending on the type of roof, location and proximity of roofs to areas with trees or in areas with high levels of pollution.

More details on the document Maintenance and repair recommendations for flat roofs waterproofed with modified bitumen sheets

HANDLING, STORAGE AND CONSERVATION

- This product is not toxic or flammable.
- It must be stored dry and protected from rain, sun, heat and low temperatures.
- It must be stored upright.
- Don't store two pallets high.
- You must use the oldest batch of products first.
- No waterproofing works should be performed when weather conditions may be unsuitable. These include snow or ice on the roof, heavy rain, moisture, when there are strong winds.
- In all cases, the rules of health and safety at work and the rules of good construction practice should be considered.
- To store in racking at height the shelves must have three stringers or beams under the wooden pallet.
- Before handling the pallet you must check the status of the pallet and reinforce if necessary.
- If you are using a crane for handling purposes, you must ensure protection for others as stated on our packaging.
- Danosa advise you to consult the MSDS for this product which is available at www.danosa.com or may be obtained by writing to our Technical Department.

WARNING

The information that appears in the following document makes reference to the uses and utilities of danosa's products and systems, and it is based on the knowledge that have been learnt until present, by Danosa. This is only possible if products have been stored and used in an appropriate way.

Nevertheless, Danosa is not responsible for unsuitable uses of the products neither any other facts, such as meteorological facts. So Danosa is just responsible for the quality related to the provided products. Danosa reserves the right to carry out modifications without previous notice.

The values that appear in the technical sheet are the results of the tests that have been performed in our laboratory. December 2014.

Web site: www.danosa.com E-mail: export@danosa.com Phone number: +34 949 888 210