


SELF-LOCKING WASHERS (Round)

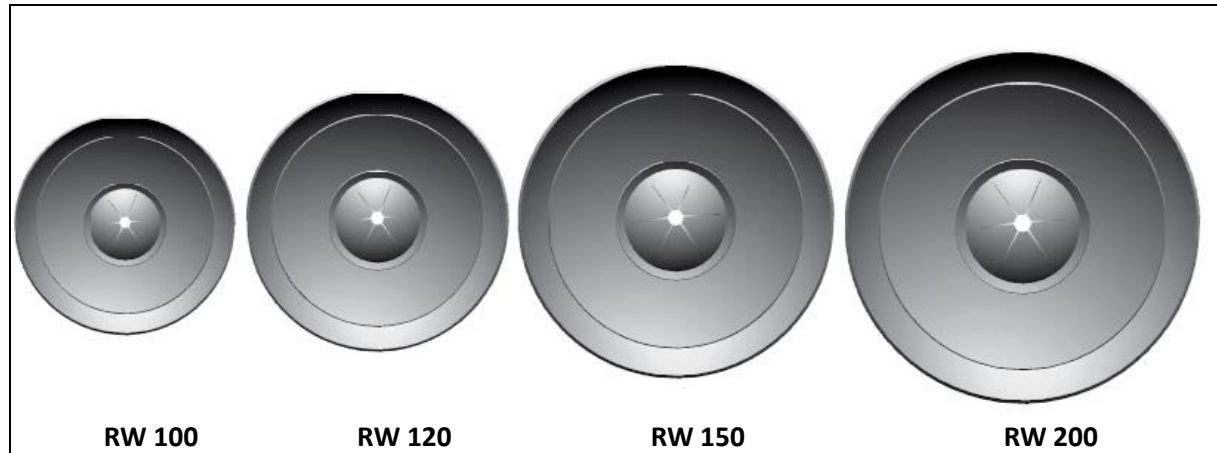

Type	RW 100	RW 120	RW 150	RW 200
Diameter	1"	1-3/16"	1-1/2"	2"
Thickness	.015nom.	.015nom.	.015nom.	.015nom.
Material	Mild Steel	Mild Steel	Mild Steel	Mild Steel
Plating	Galv.	Galv.	Galv.	Galv.
Edges / flat or beveled	Beveled	Beveled	Beveled	Beveled
Other materials available	Alum.,S.S.	Alum.,S.S.	Alum.,S.S.	Alum.,S.S.
Packaged per carton	1000	1000	1000	1000

BRG Self-Locking Washers are used in conjunction with weld pins, insul-anchors and lacing anchors to fasten insulation in place. Simply press the self-locking washer onto the pin up to the insulation until the desired position is reached. Then clip off, (or bend over) the remaining portion of pin for a permanent attachment.

Both Round or Square self-locking washers are available as a matter of design or application preference. The domed, multi-lanced hole design

provides for ease of locating washer on pin and positive locking. Washers are manufactured with a beveled edge to prevent the washer from cutting into the insulation facing.

BRG Self-Locking Washers are available according to the chart above and with standard 10GA, 12GA, or 14GA hole sizes off-the-shelf. Others material/plating combinations and hole sizes are available by special order.

TO ORDER OR SPECIFY, GIVE:

1. Product Code.....RW
2. Material.....MS, SS, AL
3. Type.....100, 120, 150, or 200
4. Diameter of pin/stud on which washer is to be used.....

BUILDING RESOURCES GROUP PTE LTD

31 Tuas Ave 8, Singapore 639245

Tel : +65 6861 7091 | Fax : +65 6861 7092 | Email : sales@buildingresourcesgroup.com